





# ICON BOILER SERIES 300 LOW TEMPERATURE BOILER





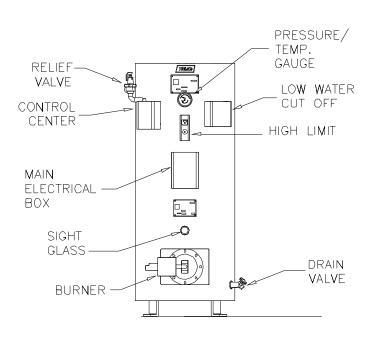

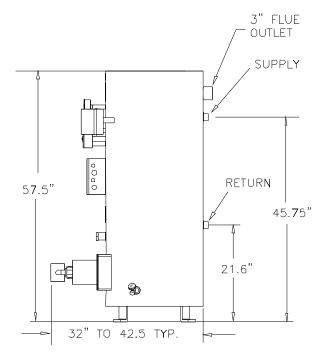

Note: Dimensions subject to change without notice. For ATM boiler, flue is 9 " out the top, 6" if oil burner .



## SERIES 300 LOW TEMPERATURE BOILER (Model 300 LT)

The Series 300 is a steel vertical firetube packaged boiler with a water-backed combustion chamber equipped with high-" doorway. efficiency turbulators. Boilers come fully wired, and fit through a 32

STANDARD EQUIPMENT:

Forced Draft or Atmospheric Burner

Circulating Pump for Coil

Copper coil -60' long, 1.25" diameter

Honeywell Control Center

Low Water Cut-Off

Combination Pressure/Temperature Gauge

**Operating Light** Relief Valve

Second Safety High Limit with Manual Reset

Vessel Pressure Rating of 125 PSI

### **SPECIFICATIONS:**

**OPTIONAL EQUIPMENT:** Gas Fired (NG or Propane), Oil Fired, or Dual Fuel Burners **UL and FM Compliance** Sealed Combustion Air Intake **Barometric Dampers** LWCO with Manual or Auto Reset, Test Light, and/or Test Button

Input BTU/Hr	Output BTU/Hr	Efficiency	GPM @ °F Rise
'	'	,	
210,000 ATM	171,990	82.0%	6.8 @ 50°F
300,000 ATM	240,400	80.1%	9.5 @ 50°F
210,000 HEP	182,280	86.8%	7.3 @ 50°F
300,000 HEP	255,000	85.0%	10.3 @ 50°F
375,000 HEP	316,000	84.3%	12.9 @ 50°F

Note: Typical for Natural Gas. - Oil or LP burner data may vary.

**APPLICATIONS:** 

Domestic Hot Water - typically 60°F - 130°F

**CONNECTIONS:** 

Supply & Return Openings — 1.25 "

The Series 300 can operate on its own controls, but a microprocessor control panel is recommended for sequencing more than two boilers to minimize run-time and fuel usage.

120V, 60Hz, Single Phase, fused for 10 amps (ATM burner) or 20 amps (Power burner). Min / Max gas pressure typically 5 " / 14" WC.

WEIGHT/VOLUME:

Shipping Weight - 750 lbs. Operating Weight - 1040 lbs. Vessel Water Volume - 35 Gallons

Factory built copper or steel mains available upon request.

ICON BOILER REPRESENTATIVE:	

**ICON BOILER** 2025 16th Street Greensboro, NC 27455 (844)562-ICON iconboiler.com